

VIENNA SERIES PS-TLXXWGL45



WATTAGE ADJUSTABLE FROM 20-50W

SYSTEM EFFICIENCY UP TO 120lm/W

GRID OPTICS WITH LOW GLARE FOR EYES COMFORT

PRODUCT DATASHEET

Vienna Series Track Linear Light 20-50W

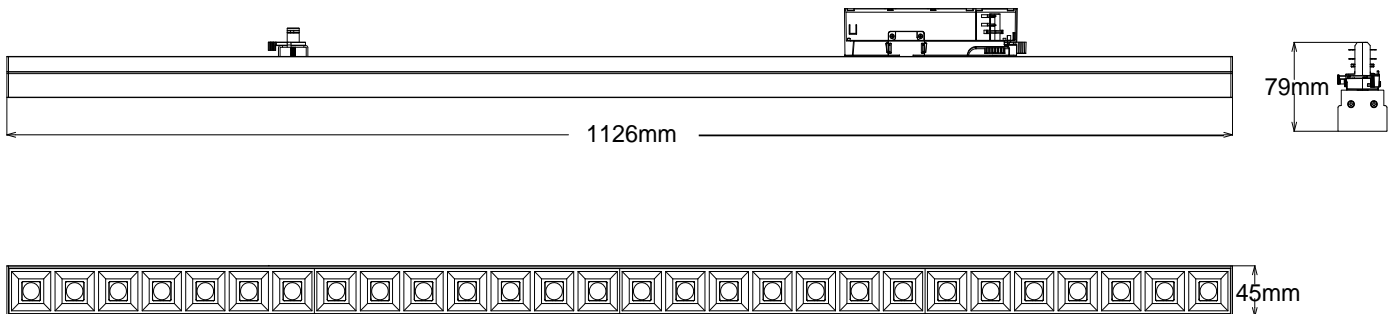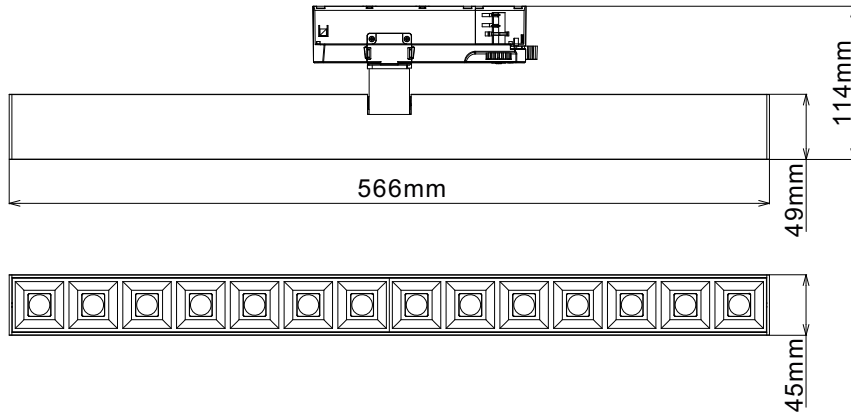

Areas of application

- Supermarket, Shopping Mall
- Retail Store
- Library
- Car Shop, Office, Meeting Room

Product features

- PS-TLXXWGL45 355° horizontal & 180° vertical flexible rotation
- Quality lens to provide clean & uniform lighting
- Professional SMD LEDs with carefully selected batch SDCM<3
- Aluminum housing with convective holes for better heat dissipation

Product benefits

- Employs a high PF flicker-free power supply
- UGR<13, reduce glare
- Easy and quick installation with multiple track adapters
- Elegant and compact design Compliant with CE/CB/RoHS/SAI/ ENEC certificates

Specification		
Power	20/30/40/50W	
LED	Lumileds/Osram SMD 2835/3030	
Driver	Osram / Tridonic /Global / KGP	
Input Voltage	AC220-240V, 50/60Hz	
CCT	2700/3000/3500/4000/5000K	
CRI	83/92Ra	
SDCM	<3	
Beam Angle	30°/50°/80°/ 30x70°/120°	
Track Adapter	1 Phase / 3 Phase	
System Efficacy	100-120 lm/W	
Housing Material	Aluminum	
Housing Size	L566*W45*H114mm/ L1126*W45*H79mm	
Colour Of Housing	White/Black	
PF	>0.9	
THD	<15%	
Dimmable	On-off / 0-10V / Triac / Dali/ Casambi	

Optics





PC - 120° beam

Lens+Reflector - 30°/50°/80°/ 30x70° beam

PRODUCT DATASHEET

Vienna Series Track Linear Light XXW

Installation

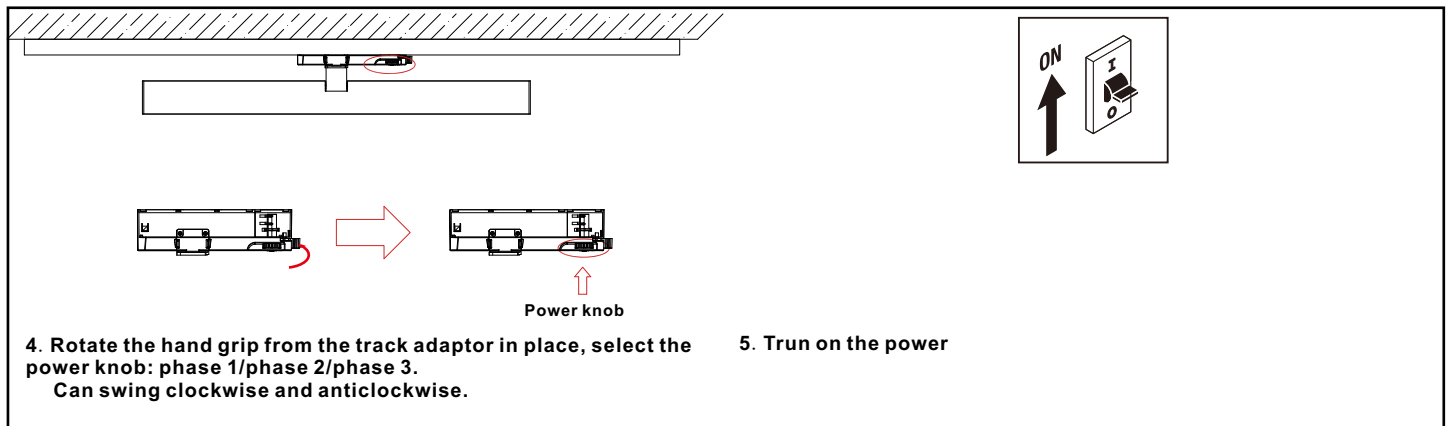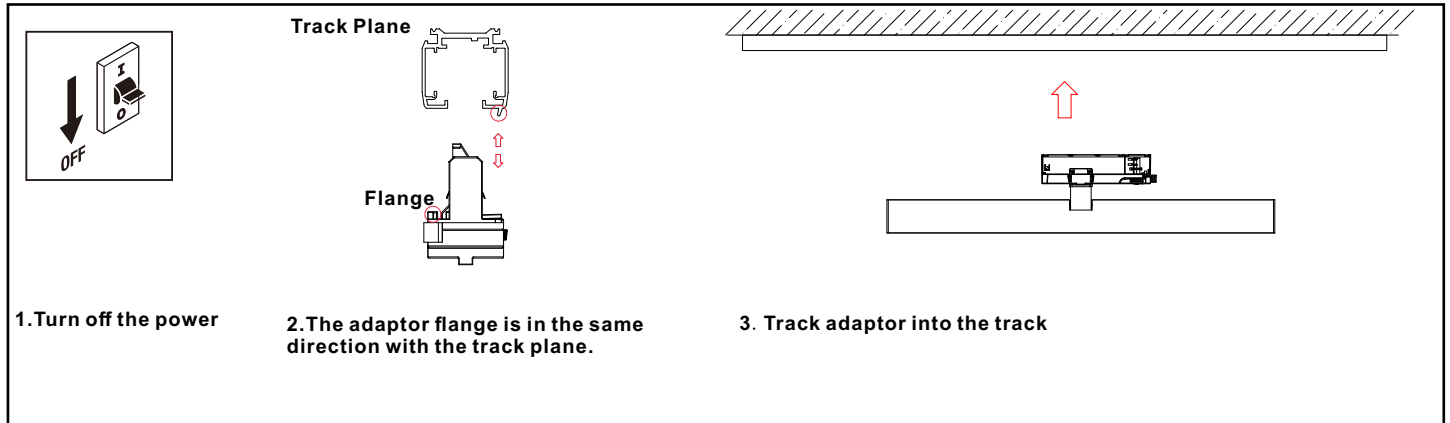

Installation instructions:

Electrical connection must only be carried out by skilled, trained and authorized persons.

- Before installation, please ensure the main power is off.
- Be sure that the local power outlet matches that of the required voltage for this unit.
- Always mount this unit in safe and stable matter.
- Do not remove the cover under any conditions. There are no user serviceable parts inside.
- This unit is intended for indoor use only, use of this product outdoors, would void all warranties.