



POWERSTAR



PYRA SERIES PS-TLXXW(D)W86


WALL WASH LIGHT WITH UNIFORM VERTICAL ILLUMINANCE

SYSTEM EFFICIENCY UP TO 150lm/W


EFFICIENT AND COST-EFFECTIVE LED LIGHTING TECHNOLOGY

PRODUCT DATASHEET



Wall Wash Track Light XXW

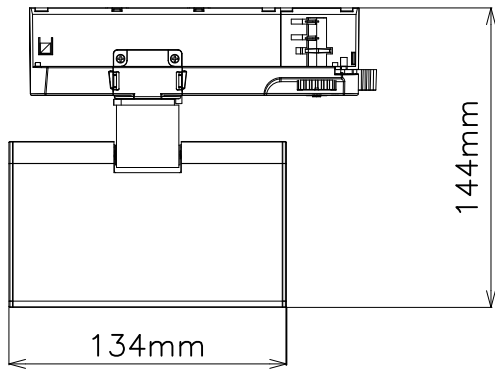

W86

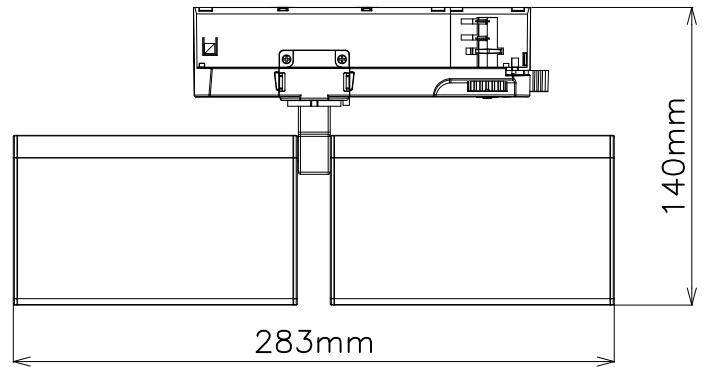

DW86

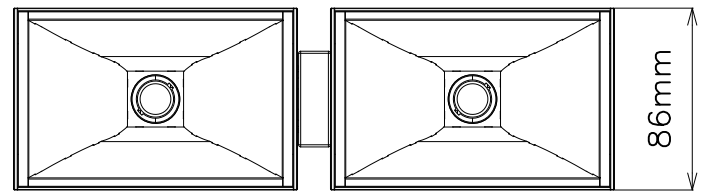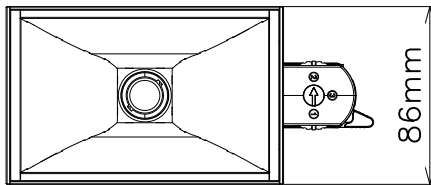

Areas of application

- Museum & Art Gallery
- Commercial Center
- Car Shop, Office, Meeting Room
- Supermarket, Shopping mall, Fashion Store

Product features



- Wall wash light distribution, uniform vertical illuminance
- Efficient and cost-effective LED lighting technology
- System Efficiency up to 150lm/W
- More than 50,000 hours life span

Product benefits

- Employs a high PF flicker-free power supply
- Easy and quick installation with multiple track adapters
- Elegant and compact design
- Compliant with CE/CB/RoHS/SAA/ENEC certificates

| Specification | |
|-------------------|--|
| Power | 30/35W(W86) 40/45/50W(DW86) |
| LED | Citizen / Luminus / Bridgelux / Cree |
| Driver | Osram / Tridonic /Global / KGP |
| Input Voltage | AC220-240V, 50/60Hz |
| CCT | 2700/3000/3500/4000/5000K |
| CRI | 83/92Ra (97Ra Optional) |
| SDCM | <3 |
| Beam Angle | 55°/90° |
| Track Adapter | 1 Phase / 3 Phase |
| System Efficacy | 150lm/W |
| Housing Material | Aluminum |
| Housing Size | L134*W86*H144mm(W86),L283*W86*H140mm(DW86) |
| Colour Of Housing | White/Black |
| PF | >0.9 |
| THD | <15% |
| Dimmable | On-off / 0-10V / Triac / Dali |

Wall Washer

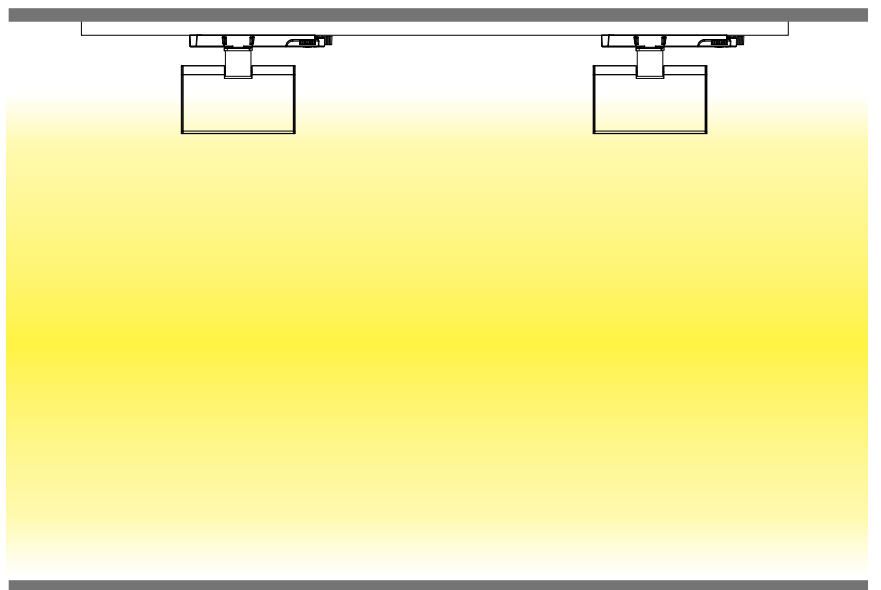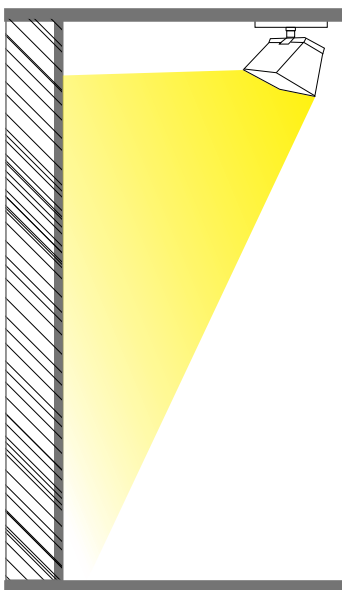

PRODUCT DATASHEET

Wall Wash Track Light XXW

Installation

1. Turn off the power

2. The adaptor flange is in the same direction with the track plane.

3. Track adaptor into the track

4. Rotate the hand grip from the track adaptor in place, select the power knob: phase 1/phase 2/phase 3. Can swing clockwise and anticlockwise.

5. Turn on the power

Installation instructions:

Electrical connection must only be carried out by skilled, trained and authorized persons.

- Before installation, please ensure the main power is off.
- Be sure that the local power outlet matches that of the required voltage for this unit.
- Always mount this unit in safe and stable matter.
- Do not remove the cover under any conditions. There are no user serviceable parts inside.
- This unit is intended for indoor use only, use of this product outdoors, would void all warranties.